Extended Thinking for Gesture Interaction in Extended Spaces

Radu-Daniel Vatavu
MintViz Lab
Ştefan cel Mare University of Suceava
Suceava, Romania
radu.vatavu@usm.ro

Jean Vanderdonckt
LouRIM & ICTeam Institutes
Université catholique de Louvain
Louvain-la-Neuve, Belgium
jean.vanderdonckt@uclouvain.be

Figure 1: Even in the vastness of open spaces (left), gesture interaction remains human scale (right). In this paper, we explore this tension with an analysis of end-user elicited gestures, which we characterize along both movement and cognitive dimensions from the unique perspective of extended thinking, a recent paradigm for reasoning on immersion in XR environments [25].

Abstract

Spatial interaction is typically designed around body-scale gestures, yet extended spaces provide a different perspective. In this work, we apply the Extended Thinking framework to analyze user-defined gestures for an extreme setting. Our findings, on the relationship between the scale of the environment and that of the human body, contribute insights for future spatial interaction design.

CCS Concepts

• **Human-centered computing** → *Field studies*; **Gestural input**; **Mixed / augmented reality**; • **Applied computing** → **Aerospace**.

Keywords

Interaction in space, Mars, gestures, SpaceCHI, Extended thinking

This work is licensed under a Creative Commons Attribution 4.0 International License.
SUI '26, Bari, Italy
© 2026 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-2812-9/2026/10
https://doi.org/10.1145/3822518.3839310

ACM Reference Format:
Radu-Daniel Vatavu and Jean Vanderdonckt. 2026. Extended Thinking for Gesture Interaction in Extended Spaces. In *ACM Symposium on Spatial User Interaction (SUI '26), October 10–11, 2026, Bari, Italy*. ACM, New York, NY, USA, 3 pages. https://doi.org/10.1145/3822518.3839310

1 Introduction

Gesture interaction has traditionally been designed for and employed in environments reflecting the body scale, from the smallest settings as in microgesture input [4,12] to interactions with mobile devices [17], choreographed whole-body gestures at the intersection of art and robotics [19], and gestures performed with reference to the scale of a room [3,9] or an amphitheater [11]. All these environments, however, are controlled, readily integrating gesture sensing technology [1,20,27] and familiar feedback [29]; consequently, gestures reflect everyday intuitiveness [31], ergonomics [8], and meaning [21]. At the opposite end, vast environments, such as the extreme settings encountered in space missions [7], offer a different context for gesture interaction, where traditional assumptions about the scale of environment vs. human body no longer hold.

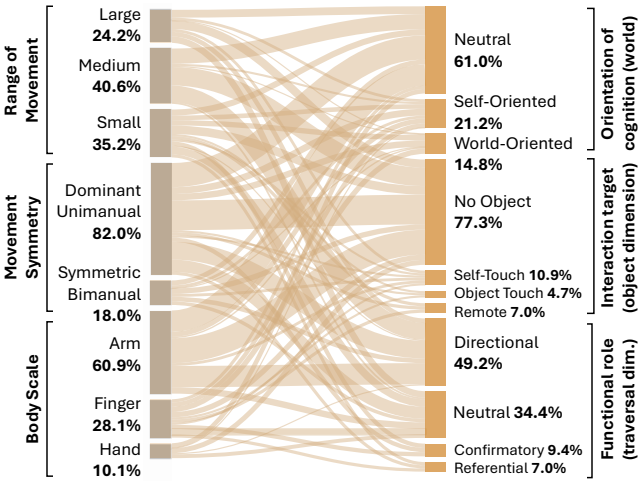

Figure 2: Gesture movement and cognitive attributes (N=128).

In this paper, we contribute an analysis of gestures performed in an extended space [24] by adopting the perspective of extended thinking [25], a recently proposed paradigm for immersion in XR environments. To this end, we conceptualize extended spaces as an extreme form of physical reality, with defining elements of extreme interactions [26]. The photograph in Figure 1, left emphasizes the *environment scale* of such a setting: vast, exposed, and remote; the photographs on the right focus on the *human scale*, exemplifying gestures performed by crew members. This tension of scales has implications for HCI in space [2] and space exploration [14,15].

2 Study

We analyze a set of 128 gestures collected from 8 analog astronauts (five male and three female, aged 21 to 30 years, M=24.8, SD=2.8), who spent two weeks at the Mars Desert Research Station (MDRS) [23], a research facility located in the Utah desert and surrounded by a Jurassic-Cretaceous geologic landscape [28] (Figure 1, left). Because the sample size was constrained by the housing capacity at the MDRS, we report a qualitative analysis of the elicited gestures according to their movement characteristics (range of movement, symmetry, body part) [13] and corresponding dimensions of extended thinking [25] (world, object, and traversal). Figure 1, right shows examples of gestures performed using the Tap Strap 2 device [22]. Gestures were collected following the end-user elicitation method [30] in response to 16 referents; details in [24].

To characterize gestures in terms of motor complexity, coordination, and body movement, we extracted the following attributes:

- **Range of movement,** defined by the proximity of the hands to the body during gesture production, with three categories, following Gheran et al. [6]: *small, medium,* and *large.*
- **Movement symmetry** characterizes how the hands are employed for the gesture. Following Piumsomboon et al. [16], we classified gestures as *dominant unimanual*, *nondominant unimanual*, *symmetric bimanual*, and *asymmetric bimanual.*
- **Body scale** of gesture production, defined according to the primary involved body part: *finger, hand,* and *arm.*

From the extended thinking framework [25], we adopted the following dimensions to describe cognitive roles of gestures:

- **Orientation of cognition**, corresponding to **the world dimension** in [25], describes reasoning about the nature of the world and one's presence within it. We distinguish three categories: *world-oriented* (gestures that intentionally reference the surrounding environment), *self-oriented* (gestures referencing the user's body), and *neutral* (gestures that imply no relationship with the external world or the self).
- **Interaction target,** corresponding to **the object dimension** in [25], describes reasoning about the nature of objects and the experiences they enable. We distinguish four categories: *remote reference* (gestures referring to a distant object), *object touch* (gestures involving direct interaction with an object), *self-touch* (direct interaction with the body), and *no object* (no explicit object interaction is depicted or implied).
- **Functional role,** according to **the traversal dimension** in [25], describes reasoning about navigation across different realities and object representations. We distinguish four categories: *directional* (gestures indicating navigation through space), *referential* (gestures indicating a destination, target, or representation) *confirmatory* (gestures that confirm the surrounding physical reality via movement and tactile sensations), and *neutral* (gestures with no traversal role).

We found a relatively balanced distribution of the elicited gestures in terms of movement range, with 40.6% *medium* gestures, but a majority of *dominant unimanual* (82.0%) and *arm* (60.9%) movements. According to their cognitive roles, 21.2% of the elicited gestures were *self-oriented*, 10.9% involved *self-touch*, and nearly half (49.2%) served a *directional* function; see Figure 2. At the same time, most gestures did not exhibit any particular orientation of cognition (61.0%), depicted object (77.3%), or functional role (34.3%). These findings align with the vastness and remoteness of the open space (Figure 1), and suggest a mismatch between the scale of the environment and that of the human body. The mappings between movement and cognitive characteristics are relatively uniform, without any discernible pattern emerging, which further suggests a lack of structure across the environment-body scales. For the consensus analysis of the elicited gestures, we refer to [24], while the complete set of gestures is provided in the supplemental material.

3 Conclusion

We explored end-user gestures through the lens of extended thinking [25], highlighting the tension between environment and body scales via movement and cognitive gesture attributes. Future work is recommended to further explore this tension in other spatial interaction contexts, including XR worlds with different opportunities for body movement [18,32] and environment [5,10] simulations.

Acknowledgments

This work was supported by a grant of the Ministry of Education and Research, CCCDI-UEFISCDI, project no. PN-IV-PCB-RO-MD-2024-0130, within PNCDI IV. The Sankey diagram in Figure 2 was created with https://sankeymatic.com and post-edited manually. We sincerely thank the study participants [24] for their time, involvement, and dedication during the MDRS mission.

References

[1] Fadel Adib and Dina Katabi. 2013. See through walls with WiFi! *SIGCOMM Comput. Commun. Rev.* 43, 4 (Aug. 2013), 75–86. doi:10.1145/2534169.2486039

[2] Leonie Bensch, Tommy Nilsson, Martin Nisser, Pat Pataranutaporn, Albrecht Schmidt, and Valentina Sumini. 2025. *Advancing Human-Computer Interaction for Space Exploration.* Leibniz-Zentrum für Informatik, Schloss Dagstuhl, Germany. https://drops.dagstuhl.de/entities/volume/OASIcs-volume-130

[3] Richard A. Bolt. 1980. "Put-That-There": Voice and Gesture at the Graphics Interface. *ACM SIGGRAPH Computer Graphics* 14, 3 (July 1980), 262–270. doi:10.1145/965105.807503

[4] Adrien Chaffangeon Caillet, Alix Goguey, and Laurence Nigay. 2025. Microgesture + Grasp: A Journey from Human Capabilities to Interaction with Microgestures. *International Journal of Human-Computer Studies* 195 (2025), 103398. doi:10.1016/j.ijhcs.2024.103398

[5] Lung-Pan Cheng, Yi Chen, Yi-Hao Peng, and Christian Holz. 2023. Reality Rifts: Wonder-ful Interfaces by Disrupting Perceptual Causality. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems (CHI '23)*. ACM, New York, NY, USA, Article 458, 15 pages. doi:10.1145/3544548.3581454

[6] Bogdan-Florin Gheran, Jean Vanderdonckt, and Radu-Daniel Vatavu. 2018. Gestures for Smart Rings: Empirical Results, Insights, and Design Implications. In *Proceedings of the 2018 Designing Interactive Systems Conference (DIS '18)*. ACM, New York, NY, USA, 623–635. doi:10.1145/3196709.3196741

[7] Sandra Häuplik-Meusburger and Sheryl Bishop. 2021. Introduction. In *Space Habitats and Habitability: Designing for Isolated and Confined Environments on Earth and in Space*. Springer, Cham, 1–8. doi:10.1007/978-3-030-69740-2_1

[8] Eve Hoggan, Miguel Nacenta, Per Ola Kristensson, John Williamson, Antti Oulasvirta, and Anu Lehtiö. 2013. Multi-Touch Pinch Gestures: Performance and Ergonomics. In *Proceedings of the 2013 ACM International Conference on Interactive Tabletops and Surfaces (ITS '13)*. ACM, New York, NY, USA, 219–222. doi:10.1145/2512349.2512817

[9] Masoumehsadat Hosseini, Heiko Mueller, and Susanne Boll. 2024. Controlling the Rooms: How People Prefer Using Gestures to Control Their Smart Homes. In *Proceedings of the CHI Conference on Human Factors in Computing Systems (CHI '24)*. ACM, New York, NY, USA, Article 550, 18 pages. doi:10.1145/3613904.3642687

[10] Pingchuan Ke, Kai-Ning Keng, Shanshan Jiang, Shaoyu Cai, Zhiyi Rong, and Kening Zhu. 2019. Embodied Weather: Promoting Public Understanding of Extreme Weather Through Immersive Multi-Sensory Virtual Reality. In *Proceedings of the 17th ACM SIGGRAPH International Conference on Virtual-Reality Continuum and Its Applications in Industry (VRCAI '19)*. ACM, New York, NY, USA, Article 60, 2 pages. doi:10.1145/3359997.3365718

[11] Jean-Yves Lionel Lawson, Jean Vanderdonckt, and Radu-Daniel Vatavu. 2018. Mass-Computer Interaction for Thousands of Users and Beyond. In *Extended Abstracts of the 2018 CHI Conference on Human Factors in Computing Systems (CHI EA '18)*. ACM, New York, NY, USA, 1–6. doi:10.1145/3170427.3188465

[12] Chi-Jung Lee, Jiaxin Li, Tianhong Catherine Yu, Ruidong Zhang, Vipin Gunda, François Guimbretière, and Cheng Zhang. 2025. Grab-n-Go: On-the-Go Microgesture Recognition with Objects in Hand. *Proc. ACM Interact. Mob. Wearable Ubiquitous Technol.* 9, 3, Article 99 (Sept. 2025), 27 pages. doi:10.1145/3749469

[13] Mehdi Ousmer, Jean Vanderdonckt, and Sabin Buraga. 2019. An ontology for reasoning on body-based gestures. In *Proceedings of the ACM SIGCHI Symposium on Engineering Interactive Computing Systems (EICS '19)*. ACM, New York, NY, USA, Article 17, 6 pages. doi:10.1145/3319499.3328238

[14] Pat Pataranutaporn, Valentina Sumini, Ariel Ekblaw, Melodie Yashar, Sandra Häuplik-Meusburger, Susanna Testa, Marianna Obrist, Dorit Donoviel, Joseph Paradiso, and Pattie Maes. 2021. SpaceCHI: Designing Human-Computer Interaction Systems for Space Exploration. In *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*. ACM, New York, NY, USA, 96:1–6. doi:10.1145/3411763.3441358

[15] Pat Pataranutaporn, Valentina Sumini, Melodie Yashar, Susanna Testa, Marianna Obrist, Scott Davidoff, Amber M. Paul, Dorit Donoviel, Jimmy Wu, Sands A Fish, Ariel Ekblaw, Albrecht Schmidt, Joe Paradiso, and Pattie Maes. 2022. SpaceCHI 2.0: Advancing Human-Computer Interaction Systems for Space Exploration. In *Extended Abstracts of the 2022 CHI Conference on Human Factors in Computing Systems (CHI EA '22)*. ACM, New York, NY, USA, Article 77, 7 pages. doi:10.1145/3491101.3503708

[16] Thammathip Piumsomboon, Adrian Clark, Mark Billinghurst, and Andy Cockburn. 2013. User-Defined Gestures for Augmented Reality. In *Proceedings of the 14th IFIP Conference on Human-Computer Interaction, Lecture Notes in Computer Science, vol. 8118 (INTERACT '13)*, Paula Kotzé, Gary Marsden, Gitte Lindgaard, Janet Wesson, and Marco Winckler (Eds.). Springer, Berlin, Heidelberg, 282–299. doi:10.1007/978-3-642-40480-1_18

[17] Benjamin Poppinga, Alireza Sahami Shirazi, Niels Henze, Wilko Heuten, and Susanne Boll. 2014. Understanding Shortcut Gestures on Mobile Touch Devices. In *Proceedings of the 16th International Conference on Human-Computer Interaction with Mobile Devices & Services (MobileHCI '14)*. ACM, New York, NY, USA, 173–182. doi:10.1145/2628363.2628378

[18] Tomoya Sasaki, Kao-Hua Liu, Taiki Hasegawa, Atsushi Hiyama, and Masahiko Inami. 2019. Virtual Super-Leaping: Immersive Extreme Jumping in VR. In *Proceedings of the 10th Augmented Human International Conference 2019 (AH '19)*. ACM, New York, NY, USA, Article 18, 8 pages. doi:10.1145/3311823.3311861

[19] Giuseppe Saviano, Alberto Villani, and Domenico Prattichizzo. 2026. From Cage to Stage: Mapping Aesthetic Dance Movements Onto an Industrial Robot. *ACM Transactions on Human-Robot Interaction* (July 2026), 36 pages. doi:10.1145/3822502

[20] Arthur Sluÿters, Sébastien Lambot, and Jean Vanderdonckt. 2022. Hand Gesture Recognition for an Off-the-Shelf Radar by Electromagnetic Modeling and Inversion. In *Proceedings of the 27th International Conference on Intelligent User Interfaces (IUI '22)*. ACM, New York, NY, USA, 506–522. doi:10.1145/3490099.3511107

[21] Zhida Sun, Sitong Wang, Chengzhong Liu, and Xiaojuan Ma. 2022. Metaphoraction: Support Gesture-based Interaction Design with Metaphorical Meanings. *ACM Transactions on Computer-Human Interaction* 29, 5, Article 45 (Oct. 2022), 33 pages. doi:10.1145/3511892

[22] Tap Systems Inc. 2026. Tap Strap 2. Retrieved August 2026 from https://shop.tapwithus.com/products/tapwithus-tap-strap-2-wearable-keyboard-mouse-air-gesture-controller

[23] The Mars Society. 2026. Mars Desert Research Station. Retrieved August 2026 from http://mdrs.marssociety.org

[24] Jean Vanderdonckt, Radu-Daniel Vatavu, Nuwan Attygalle, Loriane Baes, Louis Baltus, Arnaud de Wergifosse, Hippolyte Hilgers, and Romain Maddox. 2026. Gesture-based Interaction in Extreme Environments: Findings from a Mars-Analog Mission with a Finger-Worn Device. In *Proceedings of the ACM Symposium on Spatial User Interaction (SUI '26)*. ACM, New York, NY, USA, 13 pages. doi:10.1145/3822518.3830049

[25] Radu-Daniel Vatavu. 2026. Extended Reality Thinking: Why Interacting in XR Environments Calls for New Cognitive Skills. In *Proceedings of the Extended Abstracts of the CHI Conference on Human Factors in Computing Systems (CHI EA '26)*. ACM, New York, NY, USA, Article 286, 6 pages. doi:10.1145/3772363.3798484

[26] Radu-Daniel Vatavu and Jean Vanderdonckt. 2025. What is Extreme in Human-Computer Interaction Research?. In *Adjunct Proceedings of the 27th International Conference on Mobile Human-Computer Interaction (MobileHCI '25 Adjunct)*. ACM, New York, NY, USA, Article 17, 7 pages. doi:10.1145/3737821.3749561

[27] Raghav H. Venkatnarayan and Muhammad Shahzad. 2018. Recognizing Gestures with Ambient Light. In *Proceedings of the 10th on Wireless of the Students, by the Students, and for the Students Workshop (S3 '18)*. ACM, New York, NY, USA, 19–21. doi:10.1145/3264877.3264883

[28] A Westenberg and J Nelson. 2010. The Mars Desert Research Station: Real Science, Real Education.. In *Proceedings of the 2010 European Planetary Science Congress*. Copernicus Gesellschaft mbH, Germany, 895–896. https://meetingorganizer.copernicus.org/EPSC2010/EPSC2010-895.pdf

[29] Nick Wittig, Yannick Dohmen, Jonathan Liebers, Donald Degraen, David Goedicke, and Stefan Schneegass. 2025. FamiliAR Feedback: Investigating Feedback Modality and Familiarity in Classroom Settings Using Spatial Augmented Reality. In *Proceedings of the 24th International Conference on Mobile and Ubiquitous Multimedia (MUM '25)*. ACM, New York, NY, USA, 273–284. doi:10.1145/3771882.3771883

[30] Jacob O. Wobbrock, Meredith Ringel Morris, and Andrew D. Wilson. 2009. User-Defined Gestures for Surface Computing. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '09)*. ACM, New York, NY, USA, 1083–1092. doi:10.1145/1518701.1518866

[31] Haijun Xia, Michael Glueck, Michelle Annett, Michael Wang, and Daniel Wigdor. 2022. Iteratively Designing Gesture Vocabularies: A Survey and Analysis of Best Practices in the HCI Literature. *ACM Trans. Comput.-Hum. Interact.* 29, 4, Article 37 (May 2022), 54 pages. doi:10.1145/3503537

[32] Difeng Yu, Joanna Bergström, and Kasper Hornbæk. 2026. A Faster VR Body to Speed Up Choices. In *Proceedings of the 2026 CHI Conference on Human Factors in Computing Systems (CHI '26)*. ACM, New York, NY, USA, Article 1416, 13 pages. doi:10.1145/3772318.3790543

Complete Gesture List

This document represents supplemental material for Vatavu and Vanderdonckt [3]. In the following, we provide the complete set of unique gestures identified among the 128 participants' proposals (more details in Vanderdonckt et al. [1]), with their characterizations in terms of movement and cognitive attributes. For example, the "swipe hand upward" gesture, proposed in 10.2% of the cases (13 gestures), is characterized by a *medium* movement range, is performed with the *dominant* hand, and primarily involves *arm* movements. From the perspective of extended thinking [3], it fulfills a *directional* role, but without any explicit orientation across the *world* or *object* dimensions.

Gesture	%	Range of Movement	Movement Symmetry	Body Scale	World Dimension	Object Dimensions	Traversal Dimension
Swipe hand upward	10.2%	Medium	Dominant Unimanual	Arm	Neutral	No object	Directional
Swipe hand downward	9.4%	Medium	Dominant Unimanual	Arm	Neutral	No object	Directional
Rotate both arms	9.4%	Large	Symmetric Bimanual	Arm	Neutral	No object	Directional
Point in a specific direction	7%	Small	Dominant Unimanual	Finger	World-oriented	Remote reference	Referential
Swipe hand left or right	7%	Medium	Dominant Unimanual	Arm	Neutral	No object	Directional
Move one arm	6.3%	Large	Dominant Unimanual	Arm	Neutral	No object	Neutral
Move fingers	5.5%	Small	Dominant Unimanual	Finger	Neutral	No object	Neutral
Touch a surface, all fingers	4.7%	Small	Dominant Unimanual	Finger	World-oriented	Object touch	Confirmatory
Move hand toward the body	4.7%	Medium	Dominant Unimanual	Arm	Self-oriented	No object	Directional
Flex the fingers	4.7%	Small	Dominant Unimanual	Finger	Self-oriented	No object	Neutral
Move the wrist	3.9%	Small	Dominant Unimanual	Hand	Neutral	No object	Neutral
Shake the hand	3.9%	Medium	Dominant Unimanual	Hand	Neutral	No object	Neutral
Touch two fingers together	3.1%	Small	Dominant Unimanual	Finger	Self-oriented	Self-touch	Confirmatory
Move hand in circular motion	3.1%	Medium	Dominant Unimanual	Arm	Neutral	No object	Directional
Cross the arms	3.1%	Large	Symmetric Bimanual	Arm	Self-oriented	Self-touch	Neutral
Bring the arms together	3.1%	Large	Symmetric Bimanual	Arm	Self-oriented	Self-touch	Neutral
Rotate the wrist	2.3%	Small	Dominant Unimanual	Hand	Neutral	No object	Directional
Move hand away from body	2.3%	Medium	Dominant Unimanual	Arm	World-oriented	No object	Directional
Touch all fingertips together	1.6%	Small	Dominant Unimanual	Finger	Self-oriented	Self-touch	Confirmatory
Extend all fingers	1.6%	Small	Dominant Unimanual	Finger	Neutral	No object	Neutral
Move both arms	1.6%	Large	Symmetric Bimanual	Arm	Neutral	No object	Neutral
Make a fist	0.8%	Small	Dominant Unimanual	Hand	Self-oriented	No object	Neutral
Raise both arms	0.8%	Large	Symmetric Bimanual	Arm	World-oriented	No object	Directional

References

[1] Jean Vanderdonckt, Radu-Daniel Vatavu, Nuwan Attygalle, Loriane Baes, Louis Baltus, Arnaud de Wergifosse, Hippolyte Hilgers, and Romain Maddox. 2026. Gesture-based Interaction in Extreme Environments: Findings from a Mars-Analog Mission with a Finger-Worn Device. In *Proceedings of the ACM Symposium on Spatial User Interaction (SUI '26)*. ACM, New York, NY, USA, 13 pages. doi:10.1145/3822518.3830049

[2] Radu-Daniel Vatavu. 2026. Extended Reality Thinking: Why Interacting in XR Environments Calls for New Cognitive Skills. In *Proceedings of the Extended Abstracts of the CHI Conference on Human Factors in Computing Systems (CHI EA '26)*. ACM, New York, NY, USA, Article 286, 6 pages. doi:10.1145/3772363.3798484

[3] Radu-Daniel Vatavu and Jean Vanderdonckt. 2026. Extended Thinking for Gesture Interaction in Extended Spaces. In *Proceedings of the ACM Symposium on Spatial User Interaction (SUI '26)*. ACM, New York, NY, USA, 4 pages. doi:10.1145/3822518.3839310